




P1808 VENUS

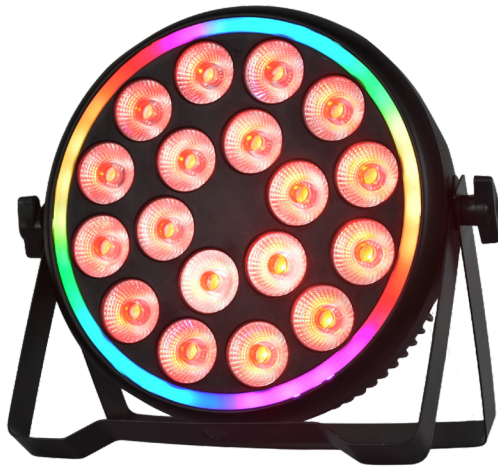

User Manual

Please keep reading this manual carefully for further use!

Thank you for choosing our product

We appreciate the confidence you have placed in our brand. You have purchased a high-quality device designed to meet modern standards of reliability and safety.

This user manual will help you familiarize yourself with the functionality of the device and ensure its proper and long-lasting operation.

Please read this manual carefully before use. Following these guidelines guarantees safe operation and validates your warranty coverage.

DMX Channels

8 Channel mode

CH	Display	Function
CH1	Dimmer	R,G,B,W dimmer : from dark to bright
CH2	R dimmer	R dimmer : from dark to bright
CH3	G dimmer	G dimmer : from dark to bright
CH4	B dimmer	B dimmer : from dark to bright
CH5	W dimmer	W dimmer: from dark to bright
CH6	Strobe	R,G,B,W strobe: from slow to fast

CH7	Function choice	0~50: DMX 8CH Control.
		51~100: Different Colors Output
		101~150: Colors Jump Change.
		151~200: Colors Gradate.
		201~250: Colors Pulse Change.
		251~255: Sound-Active
CH8	Function speed	Speed function, from slow to fast

4 Channel mode

CH	Function	Instruction
CH1	R Dimmer	Dimmer- Dark to Bright
CH2	G Dimmer	Dimmer- Dark to Bright
CH3	B Dimmer	Dimmer- Dark to Bright
CH4	W Dimmer	Dimmer- Dark to Bright

Function

No	Show	Function	Instruction
1	d001	DMX Address (001~512)	DMX-512 address set, 4 Channels mode
2	A001	DMX Address (001~512)	DMX-512 address set, 8 Channels mode
3	r255	Red (000~255)	UP, DOWN Change brightness
4	G255	Green (000~255)	UP, DOWN Change brightness
5	b255	Blue (000~255)	UP, DOWN Change brightness

6	u255	white (000~255)	UP, DOWN Change brightness
7	FH99	Strobe flash (01~99)	UP, DOWN Change the speed
8	CL01	Different Colors Output (01~08)	UP, DOWN Change brightness
9	CC99	Colors Jump Change (01~99)	UP, DOWN Change the speed
10	DE99	Colors Gradate (01~99)	UP, DOWN Change the speed
11	CP99	Colors Pulse Change (01~99)	UP, DOWN Change the speed
12	SU01	Colors sound-Active (01~09)	UP, DOWN Change the effects

Technical:

- Voltage: AC 110–220 V, 50/60 Hz
- Power supply: 200W
- Light source: 8W*18PCS
- Color: RGBW 4-in-1 LEDs
- Channel:8/4CH
- Operation: DMX512, Auto, Sound, Master-slave
- Package: 12PCS/CARTON